


APEX[®]

APEX MOTORCYCLE & SCOOTER TYRES



Scooter Racing

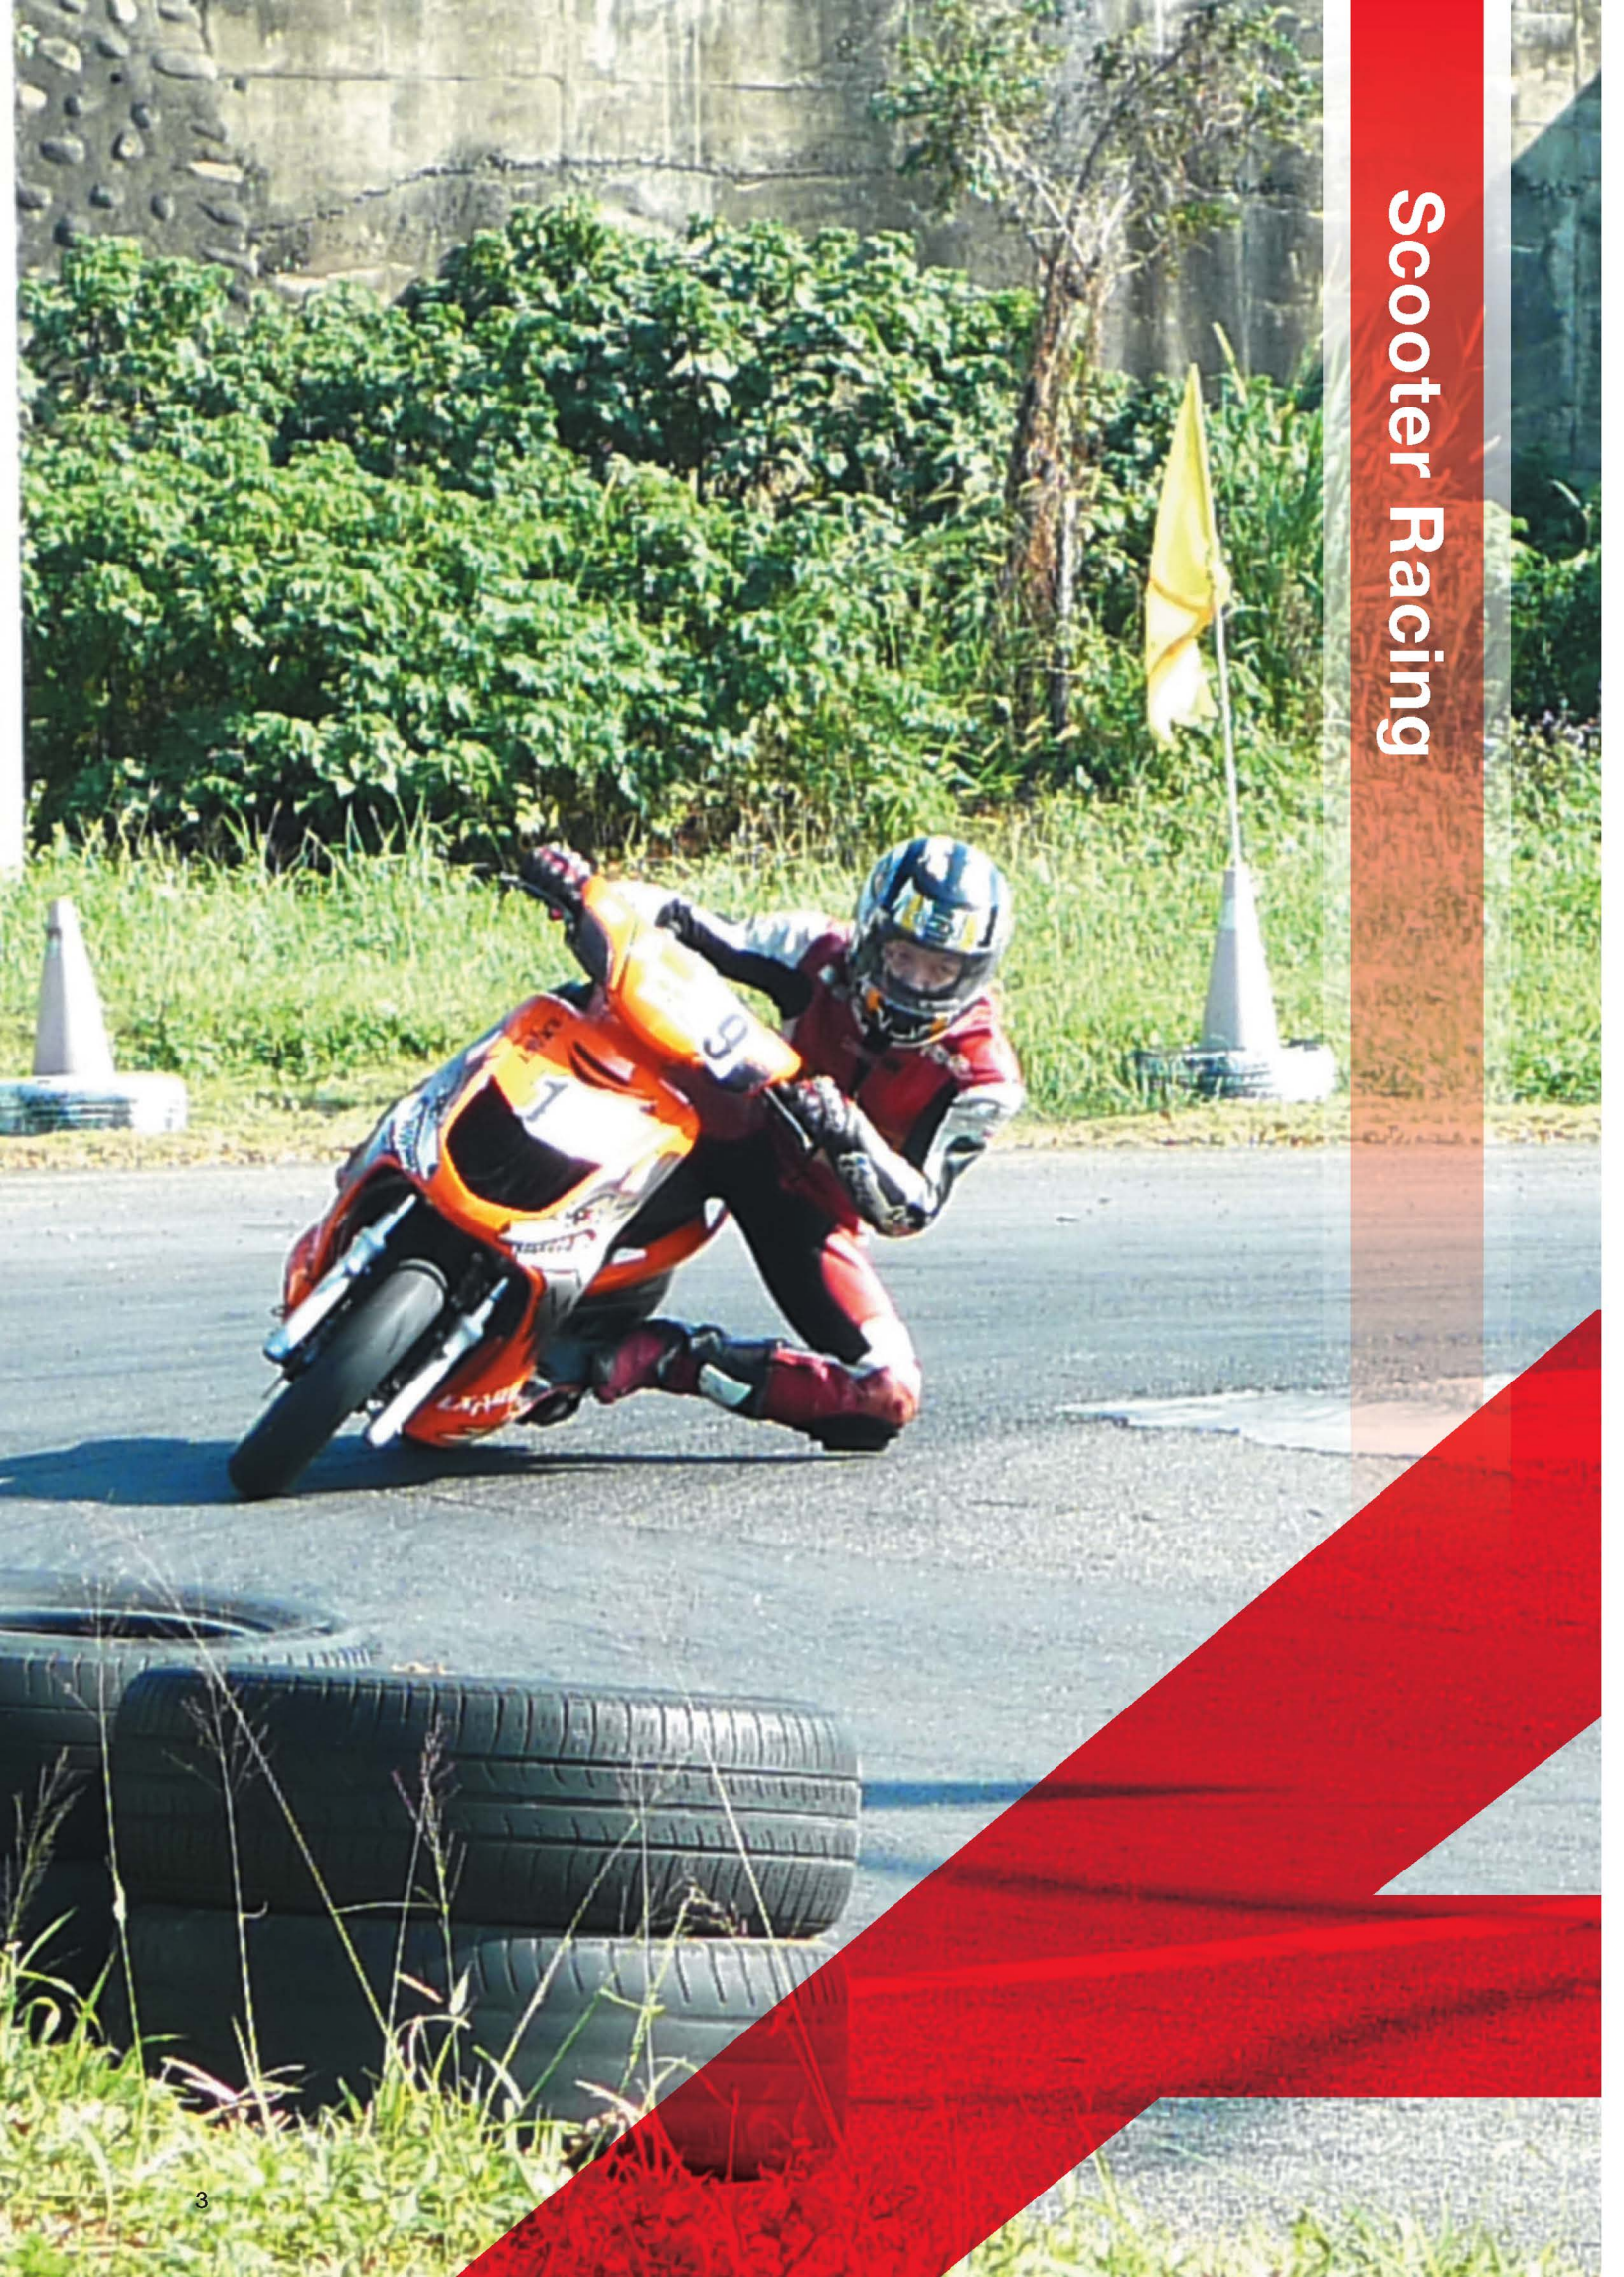



AFP01

SIZE	PATTERN	LOAD/SPEED	TT / TL	RIM WIDTH (in.)	O.D. (inch/mm)	S.W. (inch/mm)	MAX LOAD (lbs/kgs)	INFLATE (psi/kgf/cm2)	E-MARK
3.50-10	AFP01	51J	TL	2.50	17.2/437	3.6/92	567/257	36/2.5	✓
90/90-10	AFP01	50J	TL	2.15	16.4/416	3.5/90	419/190	36/2.5	✓
100/90-10	AFP01	56J	TL	2.50	17.1/434	4.0/101	567/257	36/2.5	✓
110/70-12	AFP01	47L	TL	3.00	18.1/459	4.3/110	386/175	32/2.2	✓
120/70-12	AFP01	51L	TL	3.50	18.6/473	4.8/122	520/236	32/2.2	✓
120/80-12	AFP01	55J	TL	2.75	19.6/497	4.7/119	639/290	25/1.8	✓
100/90-12	AFP01	49J	TL	2.50	19.1/485	4.0/101	617/280	25/1.8	✓



AF191

SIZE	PATTERN	LOAD/SPEED	TT / TL	RIM WIDTH (in.)	O.D. (inch/mm)	S.W. (inch/mm)	MAX LOAD (lbs/kgs)	INFLATE (psi/kgf/cm2)	E-MARK
3.50-10	AF191	51J	TL	2.50	17.2/437	3.6/92	430/195	36/2.5	✓
90/90-10	AF191	50J	TL	2.15	16.4/416	3.5/90	419/190	36/2.5	✓
100/90-10	AF191	56J	TL	2.50	17.1/434	4.0/101	567/257	36/2.5	✓
110/70-12	AF191	47L	TL	3.00	18.1/459	4.3/110	386/175	32/2.2	✓
120/70-12	AF191	51L	TL	3.50	18.6/473	4.8/122	520/236	32/2.2	✓
130/70-12	AF191	56L	TL	3.50	19.2/487	5.1/129	584/265	32/2.2	✓
120/60-13	AF191	48L	TL	3.50	18.7/474	4.8/122	397/180	32/2.2	✓
130/60-13	AF191	53L	TL	3.50	19.1/486	5.1/129	551/250	32/2.2	✓
140/60-13	AF191	57L	TL	4.00	19.6/498	5.5/139	600/272	32/2.2	-



Scooter Sport High Grip



AF885



AF889

SIZE	PATTERN	LOAD/SPEED	TT / TL	RIM WIDTH (in.)	O.D. (inch/mm)	S.W. (inch/mm)	MAX LOAD (lbs/kgs)	INFLATE (psi/kgf/cm ²)	E-MARK
140/70-12	AF885	60L	TL	3.75	19.7/501	5.5/139	639/290	32/2.2	-
110/70-12	AF889	47L	TL	3.00	18.1/459	4.3/110	386/175	32/2.2	✓

Scooter Sport





AF0R1



AF171

SIZE	PATTERN	LOAD/SPEED	TT / TL	RIM WIDTH (in.)	O.D. (inch/mm)	S.W. (inch/mm)	MAX LOAD (lbs/kgs)	INFLATE (psi/kgf/cm2)	E-MARK
3.50-10	AF0R1	51J	TL	2.50	17.2/437	3.6/92	567/257	36/2.5	-
90/90-10	AF0R1	50J	TL	2.15	16.4/416	3.5/90	419/190	36/2.5	-
100/90-10	AF0R1	56J	TL	2.50	17.1/434	4.0/101	567/257	36/2.5	-
3.00-10	AF171	42J	TL	2.15	16.3/413	3.1/80	331/150	36/2.5	✓
3.50-10	AF171	51J	TL	2.50	17.2/437	3.6/92	567/257	36/2.5	✓
90/90-10	AF171	50J	TL	2.15	16.4/416	3.5/90	419/190	36/2.5	✓
100/80-10	AF171	53J	TL	2.50	16.3/414	4.0/101	520/236	36/2.5	-
100/90-10	AF171	56J	TL	2.50	17.1/434	4.0/101	567/257	36/2.5	✓
90/90-12	AF171	54J	TL	2.15	18.4/467	3.4/85	467/212	36/2.5	-



AF181



AF183

SIZE	PATTERN	LOAD/SPEED	TT / TL	RIM WIDTH (in.)	O.D. (inch/mm)	S.W. (inch/mm)	MAX LOAD (lbs/kgs)	INFLATE (psi/kgf/cm2)	E-MARK
3.00-10	AF181	42H	TL	2.15	16.3/413	3.1/80	331/150	36/2.5	✓
3.50-10	AF181	51J	TL	2.50	17.2/437	3.6/92	567/257	36/2.5	✓
90/90-10	AF181	50J	TL	2.15	16.4/416	3.5/90	419/190	36/2.5	✓
100/90-10	AF181	56J	TL	2.50	17.1/434	4.0/101	567/257	36/2.5	✓
110/70-12	AF183	47L	TL	3.00	18.1/459	4.3/110	386/175	32/2.2	✓
120/70-12	AF183	51L	TL	3.50	18.6/473	4.8/122	520/236	32/2.2	✓
130/70-12	AF183	56L	TL	3.50	19.2/487	5.1/129	584/265	32/2.2	✓



AF209



AF396

SIZE	PATTERN	LOAD/SPEED	TT / TL	RIM WIDTH (in.)	O.D. (inch/mm)	S.W. (inch/mm)	MAX LOAD (lbs/kgs)	INFLATE (psi/kgf/cm2)	E-MARK
110/70-12	AF209	47L	TL	3.00	18.1/459	4.3/110	386/175	32/2.2	-
120/70-12	AF209	51L	TL	3.50	18.6/473	4.8/122	520/236	32/2.2	-
130/70-12	AF209	56L	TL	3.50	19.2/487	5.1/129	584/265	32/2.2	-
3.00-10	AF396	42J	TL	2.15	16.3/413	3.1/80	331/150	36/2.5	-
3.50-10	AF396	51J	TL	2.50	17.2/437	3.6/92	567/257	36/2.5	-
90/90-10	AF396	50J	TL	2.15	16.4/416	3.5/90	419/190	36/2.5	-
100/90-10	AF396	56J	TL	2.50	17.1/434	4.0/101	567/257	36/2.5	-



AF398



AF807



AF565

SIZE	PATTERN	LOAD/SPEED	TT / TL	RIM WIDTH (in.)	O.D. (inch/mm)	S.W. (inch/mm)	MAX LOAD (lbs/kgs)	INFLATE (psi/kgf/cm2)	E-MARK
3.00-10	AF398	42J	TL	2.15	16.3/413	3.1/80	331/150	36/2.5	-
3.50-10	AF398	51J	TL	2.50	17.2/437	3.6/92	567/257	36/2.5	-
90/90-10	AF398	50J	TL	2.15	16.4/416	3.5/90	419/190	36/2.5	-
100/90-10	AF398	56J	TL	2.50	17.1/434	4.0/101	567/257	36/2.5	✓
3.00-10	AF807	42J	TL	2.15	16.3/413	3.1/80	331/150	36/2.5	✓
3.50-10	AF807	51J	TL	2.50	17.2/437	3.6/92	430/195	36/2.5	✓
90/90-10	AF807	50J	TL	2.15	16.4/416	3.5/90	419/190	36/2.5	✓
100/90-10	AF807	56J	TL	2.50	17.1/434	4.0/101	567/257	36/2.5	✓
3.00-10	AF565	42J	TL	2.15	16.3/413	3.1/80	331/150	36/2.5	✓
3.50-10	AF565	51J	TL	2.50	17.2/437	3.6/92	430/195	36/2.5	✓
90/90-10	AF565	50J	TL	2.15	16.4/416	3.5/90	419/190	36/2.5	✓
100/90-10	AF565	56J	TL	2.50	17.1/434	4.0/101	567/257	36/2.5	✓



AF890



AF988



AF996

SIZE	PATTERN	LOAD/SPEED	TT / TL	RIM WIDTH (in.)	O.D. (inch/mm)	S.W. (inch/mm)	MAX LOAD (lbs/kgs)	INFLATE (psi/kgf/cm2)	E-MARK
110/70-12	AF890	47L	TL	3.00	18.1/459	4.3/110	386/175	32/2.2	✓
110/80-12	AF890	61L	TL	2.50	18.9/481	4.3/109	567/257	36/2.5	✓
3.00-10	AF988	42J	TL	2.15	16.3/413	3.1/80	331/150	36/2.5	✓
3.50-10	AF988	51J	TL	2.50	17.2/437	3.6/92	430/195	36/2.5	✓
90/90-10	AF988	50J	TL	2.15	16.4/416	3.5/90	419/190	36/2.5	✓
100/90-10	AF988	56J	TL	2.50	17.1/434	4.0/101	567/257	36/2.5	✓
120/70-12	AF988	51L	TL	3.50	18.6/473	4.8/122	520/236	32/2.2	✓
130/70-12	AF988	56L	TL	3.50	19.2/487	5.1/129	584/265	32/2.2	✓
3.00-10	AF996	42J	TL	2.15	16.3/413	3.1/80	331/150	36/2.5	✓
3.50-10	AF996	51J	TL	2.50	17.2/437	3.6/92	430/195	36/2.5	✓
80/90-10	AF996	44J	TL	1.85	15.8/402	3.1/78	353/160	36/2.5	-
90/90-10	AF996	50J	TL	2.15	16.4/416	3.5/90	419/190	36/2.5	✓
100/90-10	AF996	56J	TL	2.50	17.1/434	4.0/101	567/257	36/2.5	✓



AF998



AF0F1

SIZE	PATTERN	LOAD/SPEED	TT / TL	RIM WIDTH (in.)	O.D. (inch/mm)	S.W. (inch/mm)	MAX LOAD (lbs/kgs)	INFLATE (psi/kgf/cm2)	E-MARK
3.00-10	AF998	42J	TL	2.15	16.3/413	3.1/80	331/150	36/2.5	✓
3.50-10	AF998	51J	TL	2.50	17.2/437	3.6/92	567/257	36/2.5	✓
90/90-10	AF998	50J	TL	2.15	16.4/416	3.5/90	419/190	36/2.5	✓
100/90-10	AF998	56J	TL	2.50	17.1/434	4.0/101	567/257	36/2.5	✓
3.00-10	AF0F1	42J	TL	2.15	16.3/413	3.1/80	331/150	36/2.5	-
90/90-10	AF0F1	50J	TL	2.15	16.4/416	3.5/90	419/190	36/2.5	-
3.50-10	AF0F1	51J	TL	2.50	17.2/437	3.6/92	429/195	36/2.5	-
100/90-10	AF0F1	56J	TL	2.50	17.1/434	4.0/101	493/224	36/2.5	-

Scooter Street Standard





SIZE	PATTERN	LOAD/SPEED	TT / TL	RIM WIDTH (in.)	O.D. (inch/mm)	S.W. (inch/mm)	MAX LOAD (lbs/kgs)	INFLATE (psi/kgf/cm2)	E-MARK
3.00-10	AF762	42J	TL	2.15	16.3/413	3.1/80	331/150	36/2.5	-
3.50-10	AF762	51J	TL	2.50	17.2/437	3.6/92	567/257	36/2.5	✓
90/90-10	AF762	50J	TL	2.15	16.4/416	3.5/90	419/190	36/2.5	✓
100/90-10	AF762	56J	TL	2.50	17.1/434	4.0/101	567/257	36/2.5	✓
120/70-10	AF883	48J	TL	3.50	16.6/422	4.8/122	467/212	36/2.5	-
100/80-10	AF883	53J	TL	2.50	16.3/414	4.0/101	520/236	36/2.5	-
120/70-10	AF886	48J	TL	3.50	16.6/422	4.8/122	467/212	36/2.5	✓
120/80-10	AF886	62J	TL	2.75	17.5/444	4.6/118	520/236	40/2.8	-



AF887



AF888

SIZE	PATTERN	LOAD/SPEED	TT / TL	RIM WIDTH (in.)	O.D. (inch/mm)	S.W. (inch/mm)	MAX LOAD (lbs/kgs)	INFLATE (psi/kgf/cm ²)	E-MARK
130/70-10	AF887	52J	TL	3.50	17.2/436	5.1/129	536/243	32/2.2	-
100/80-10	AF888	53J	TL	2.50	16.3/414	4.0/101	520/236	36/2.5	-
110/80-10	AF888	58J	TL	2.50	16.9/430	4.3/109	600/272	36/2.5	-
120/70-12	AF888	51L	TL	3.50	18.6/473	4.8/122	520/236	32/2.2	✓
130/70-12	AF888	56L	TL	3.50	19.2/487	5.1/129	584/265	32/2.2	✓



AF95B



AF882

SIZE	PATTERN	LOAD/SPEED	TT / TL	RIM WIDTH (in.)	O.D. (inch/mm)	S.W. (inch/mm)	MAX LOAD (lbs/kgs)	INFLATE (psi/kgf/cm2)	E-MARK
3.00-10	AF95B	42J	TL	2.15	16.3/413	3.1/80	331/150	36/2.5	✓
3.50-10	AF95B	51J	TL	2.50	17.2/437	3.6/92	567/257	36/2.5	✓
90/90-10	AF95B	50J	TL	2.15	16.4/416	3.5/90	419/190	36/2.5	✓
100/90-10	AF95B	56J	TL	2.50	17.1/434	4.0/101	567/257	36/2.5	✓
3.00-10	AF882	42J	TL	2.15	16.3/413	3.1/80	331/150	36/2.5	-
3.50-10	AF882	51J	TL	2.50	17.2/437	3.6/92	430/195	36/2.5	-
90/90-10	AF882	50J	TL	2.15	16.4/416	3.5/90	419/190	36/2.5	✓
90/100-10	AF882	51J	TL	2.50	17.2/437	3.6/92	430/195	36/2.5	-



AF903



AF907

SIZE	PATTERN	LOAD/SPEED	TT / TL	RIM WIDTH (in.)	O.D. (inch/mm)	S.W. (inch/mm)	MAX LOAD (lbs/kgs)	INFLATE (psi/kgf/cm ²)	E-MARK
110/90-10	AF903	61J	TL	2.50	17.5/445	4.2/107	661/300	40/2.8	-
3.50-10	AF907	51J	TL	2.50	17.2/437	3.6/92	567/257	36/2.5	-



AF995



AF997

SIZE	PATTERN	LOAD/SPEED	TT / TL	RIM WIDTH (in.)	O.D. (inch/mm)	S.W. (inch/mm)	MAX LOAD (lbs/kgs)	INFLATE (psi/kgf/cm2)	E-MARK
120/90-10	AF995	66J	TL	2.75	18.5/470	4.7/119	661/300	36/2.5	-
130/90-10	AF995	70J	TL	3.00	19.2/488	5.1/129	739/335	36/2.5	-
3.00-10	AF997	42J	TL	2.15	16.3/413	3.1/80	331/150	36/2.5	✓
3.50-10	AF997	51J	TL	2.50	17.2/437	3.6/92	430/195	36/2.5	✓
90/90-10	AF997	50J	TL	2.15	16.4/416	3.5/90	419/190	36/2.5	✓
100/90-10	AF997	56J	TL	2.50	17.1/434	4.0/101	567/257	36/2.5	✓



AF999



AFS01

SIZE	PATTERN	LOAD/SPEED	TT / TL	RIM WIDTH (in.)	O.D. (inch/mm)	S.W. (inch/mm)	MAX LOAD (lbs/kgs)	INFLATE (psi/kgf/cm ²)	E-MARK
3.50-10	AF999	51J	TL	2.50	17.2/437	3.6/92	567/257	36/2.5	-
90/90-10	AF999	50J	TL	2.15	16.4/416	3.5/90	419/190	36/2.5	-
100/90-10	AF999	56J	TL	2.50	17.1/434	4.0/101	567/257	36/2.5	-
3.00-10	AFS01	42J	TL	2.15	16.3/413	3.1/80	331/150	36/2.5	✓
3.50-10	AFS01	51J	TL	2.50	17.2/437	3.6/92	567/257	36/2.5	✓
90/90-10	AFS01	50J	TL	2.15	16.4/416	3.5/90	419/190	36/2.5	✓
100/90-10	AFS01	56J	TL	2.50	17.1/434	4.0/101	567/257	36/2.5	✓

Scooter Dual Purpose



AF338



AF95A

SIZE	PATTERN	LOAD/SPEED	TT / TL	RIM WIDTH (in.)	O.D. (inch/mm)	S.W. (inch/mm)	MAX LOAD (lbs/kgs)	INFLATE (psi/kgf/cm2)	E-MARK
130/90-10	AF338	70J	TL	3.00	19.2/488	5.1/129	739/335	36/2.5	-
120/90-10	AF95A	66J	TL	2.75	18.5/470	4.7/119	661/300	36/2.5	-
130/90-10	AF95A	70J	TL	3.00	19.2/488	5.1/129	739/335	36/2.5	-



APEXWAY PRODUCTS CORP.

Taiwan Head Office:

14F-5 No.238, Shizheng N. 2nd Rd., Xitun Dist., Taichung City 407, Taiwan, R.O.C.

Tel:+886-4-2251-2251 Fax:+886-4-2251-2129

E-mail:apex@apexway.com.tw

sportfire.apexway.com.tw